

RETRACTABLE PRE - RINSE FAUCET WITH REEL HOSE

USER MANUAL

CANCAN®

• SINCE 1958 •

horeca equipment for professional

Horeca Equipment For Professional

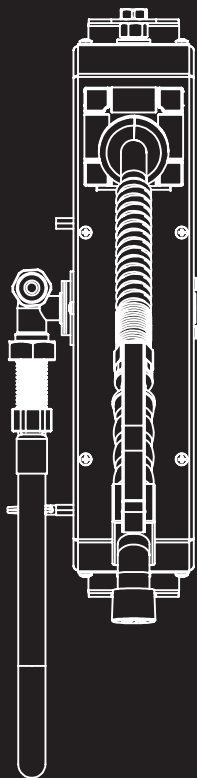


TABLE OF CONTENTS

1 - INTRODUCTION	4-5
2 - GENERAL FEATURES	4-5
3 - INSTALLATION	4-5

İÇİNDEKİLER

1 - GİRİŞ	6-7
2 - GENEL ÖZELLİKLERİ	6-7
3 - KURULUM	6-7

1. INTRODUCTION

It can be used as a pre-wash shower in industrial kitchens, food preparation and mass production plants, industrial type dishwashers, fruit and vegetable washing sinks with its 2-meter long retractable reel hose and 100 square meters working area.


2. GENERAL FEATURES

- 180 degree rotatable and wall mountable case.
- Adjustable hose output feature.
- Polyamide-bearing motion core.
- 2-stage lockable feature.
- Compatibility with hygiene standards with 100% stainless steel body.
- Special design hose resistant to 10-30 bar working pressure.


3. INSTALLATION

1- Place carrier sheet scheme on wall. Drill holes on scheme with Q12 bit in dept 50-55 mm.

2- Tack the steel dowels into holes with hammer.

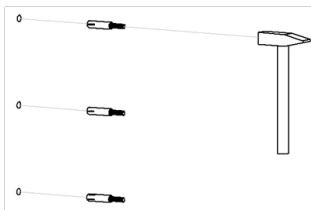


3- Provide stabilization of steel dowels inside concrete by tightening the nuts on steel dowels.

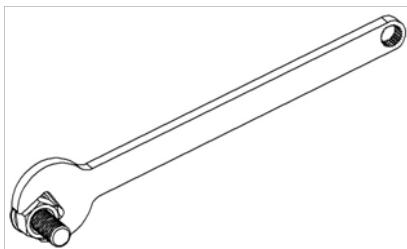


4- After stabilizing dowels, remove nuts and washers.



5- Place sheet on holes and tighten nuts and washers and shim at the same time.

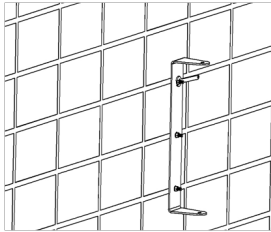

6-Tighten screws on bottom and top by bringing product to axis of U shaped metal sheet.

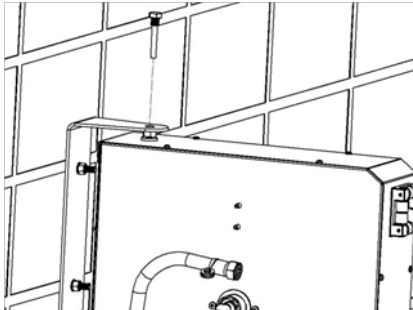

7-As you can see in the following, illustrations ,assembly direction is indicated.

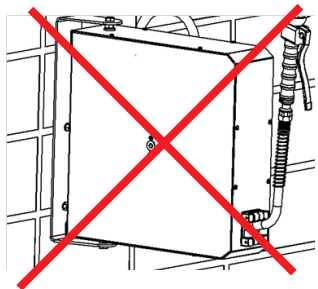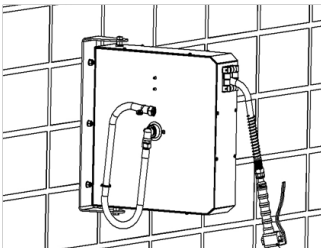

1. GİRİŞ

Endüstriyel mutfaklarda, gıda hazırlık ve toplu yemek üretim tesislerinde, sanayi tipi bulaşık makinelerinde, sebze-meyve yıkama eviyelerinde, 2 kademeli hortumuyla minimum 100 m²'lik bir alanda ön yıkama duşu olarak kullanılabilir.


2. GENEL ÖZELLİKLERİ

- Duvara monte edilebilen 180 °C dönebilen kasa.
- Ayarlanabilir hortum çıkış özelliği.
- Polyamid yataklı makara özelliği.
- 2 kademeli kilitlenebilme özelliği.
- %100 paslanmaz dış gövde ile hijyen standartlarına uygunluk.
- 10-30 bar çalışma basıncına dayanıklı özel üretim hortum.


3. KURULUM

1- Taşıyıcı Sac Bağlantı şemasını, ürünü sabitleyeceğiniz duvara yapıştırınız. Şema üzerindeki delik eksenlerini Ø12 matkap yardımıyla 50 -55 mm derinliğinde deliniz.

2- Çelik dübelleri bir çekiç vasıtasıyla deliklere çakınız.

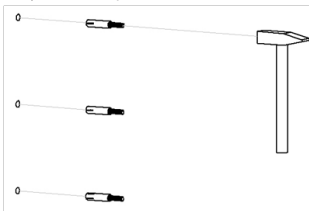


3- Çelik dübelleri üzerindeki somunları sıkarak çelik dübellerin beton içerisinde sabitlenmesini sağlayınız.

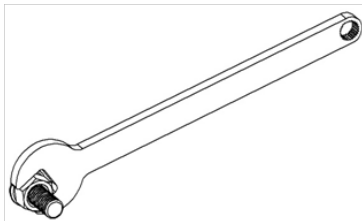


4- Çelik dübelleri sabitledikten sonra somun ve pulları sökünüz.



5- Taşıyıcı sacı çelik dübellere oturtarak pulları ve somunu sıkınız.

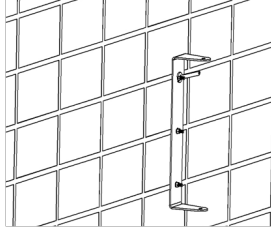


6- Ürünü U sac eksenlerine getirerek üstten ve alttan civataları sıkarak sabitleyiniz.

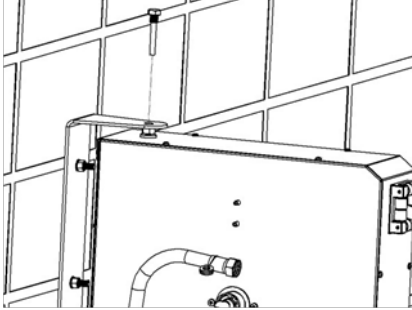

7- Aşağıdaki resimlerde de görüldüğü üzere montajların hangi yönde kurulması gerektiği belirtilmiştir.

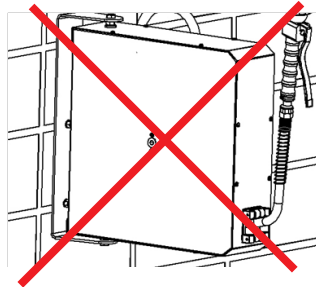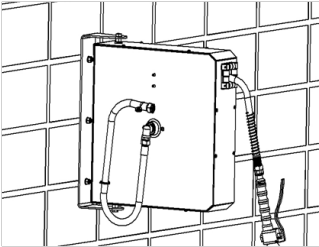

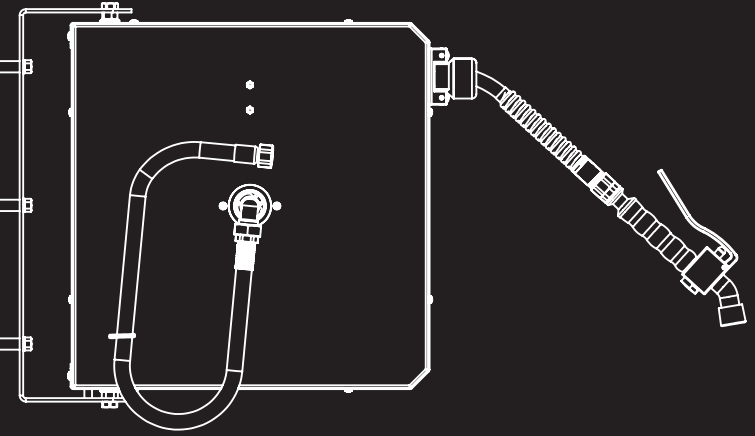

GERİ TOPLAMALI ÖN YIKAMA DUŞLARI

KULLANMA KILAVUZU

CANCAN®

• SINCE 1958 •

horeca equipment for professional